


BESCHIKBARE VARIANTEN			
LENGTE	RAL9001	RAL7016M	RAL9016
2900	-	-	-
3900	-	-	-
4900	✓	✓	✓
5900	-	-	-

✓ Beschikbaar

Glasmaat	L	Speling
2000	2085	-20 / +35
2050	2135	-20 / +35
2100	2185	-20 / +35
2150	2235	-20 / +35
2200	2285	-20 / +35
2250	2335	-20 / +35
2300	2385	-20 / +35
2350	2435	-20 / +35
2400	2485	-20 / +35
2500	2585	-20 / +35
2600	2685	-20 / +35

10mm gehard glas, rondom geslepen

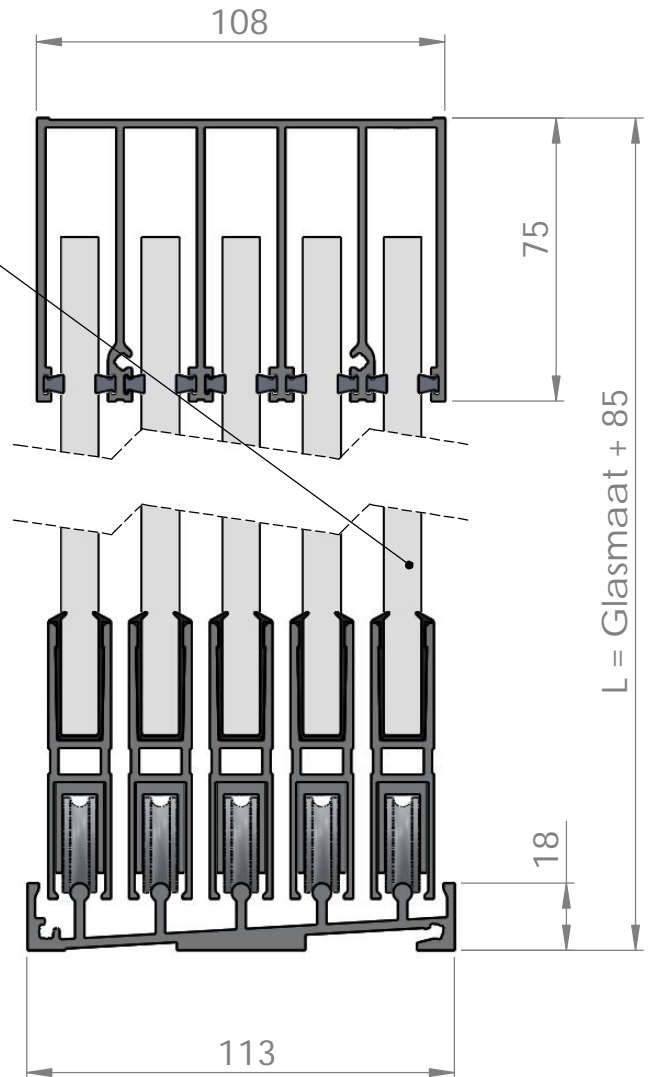

Afmetingen in mm

Deurbreedte: 980mm

DO NOT SCALE

BREAK SHARP EDGES

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ACCORDING TO NEN-ISO 2768-1m

THE INFORMATION ON THIS DRAWING IS CONFIDENTIAL
CHANGE AND / OR DISTRIBUTION OF THIS DRAWING IS ONLY
ALLOWED AFTER WRITTEN PERMISSION OF SUNROOMS B.V.

REVISION	B
DATE	13-10-2015
DRAWN	J DE JAGER
MATERIAL	
FINISH	

TITLE:

MAATSCHETS 5 SPORIGE RAIL

DWG NO.

A4



SCALE:1:2

SHEET 1 OF 1